

3F Privacy Screens / Hanging Panels / Wall Tiles





3F Free Form Felt

Privacy Panels.....	4
Specifications	6
Hanging Panels	12
Specifications	16
Wall Tiles.....	18
Specifications	24
Finishes	26
Installation + Attachments	28

Made from 50% recycled plastic water bottles and 100% recyclable.

Privacy Screens



Linear panels in Tuscan

Made from 18mm 50% recycled felt, 3F privacy screens offer premium visual and acoustical privacy in primary workstation environments. With 5 different mounting options, 3F is fully customizable to your

unique privacy needs. Specify 3F acoustical and tackable screens in our sophisticated 10-color Verve collection.



Linear (Side and Back)



Linear (Back)



L-Shape



U-Shape



Half Desk



Hooded

Installation Time
10 minutes per workstation, including brackets.

Warranty
10 years

Certifications
Oeko-Tex Standard 100
BIFMA X5.6-2016
Indoor Advantage Gold™

Care & Maintenance Instructions
Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Disinfecting
Disinfect using a ratio of 5 tablespoons (1/3 cup) bleach per gallon of water OR 4 teaspoons bleach per quart of water. This solution ratio is consistent with CDC instruction for virus and bacteria control. Do not soak or rub the diluted bleach solution into the 3F material. Instead, spray apply the diluted bleach solution as a mist and let sit for at least 1 minute before wiping off any cleaning solution residue with a damp cloth. For guaranteed safety, patch test diluted bleach solution in an inconspicuous place on the product before applying widely.

Specifications

Standard Widths	23", 28", 30", 36", 44", 46", 50", 52", 56", 58", 62", 64", 68", 70"
Standard Heights	18", 23", 28"
Half Desk Standard Widths	48", 60", 72"
Thickness	18mm / .7"
Applications	Linear, Half Desk, Hooded, L-Shape and U-Shape
Mounting Options	3F Brackets and KINEX Clips
Density	3kg/m2
Composition	100% Polyester (min. 50% recycled PET fiber)
Sound Absorption	NRC Value .85
Environmental	Oeko-Tex Standard 100 certified, VOC free
Recyclability	100% Recyclable
Bracket Compliance	BIFMA X5.6-2016

Hooded Screens	
Standard Widths	48", 54", 60", 66", 72"
Standard Heights	30"
Roof Angle	30°
Mounting Options	3F Top Mounted Bracket/Clamp



Half Desk screens in Sand



Half Desk screens in Seafoam



U-shaped screens in Verde



U-shaped screens in Pearl

Hanging Panels



Shimmer pattern in Celestial

3F offers innovative and beautiful privacy solutions, with none more dramatic or enhancing to the visual environment as our hanging panels. With 12 dynamic

patterns and 10 Verve colors, 3F hanging panels can be installed to add privacy, divide space, soften ambient sounds and enhance décor.




Botanica pattern in Seafoam



Skyline pattern in Saffron and Pearl



Solid

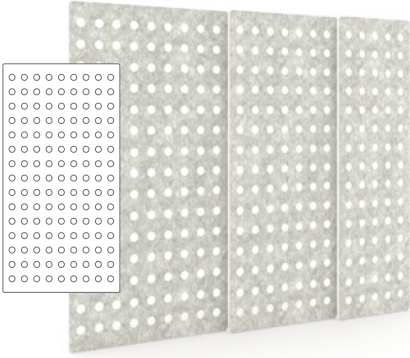


Polka



Palm




Stairstep

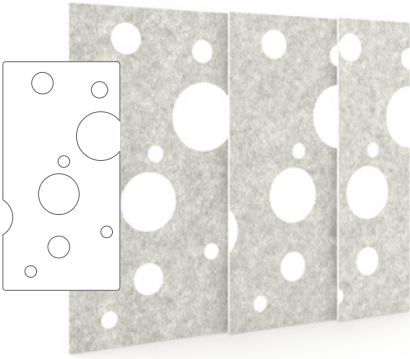


Bubbles



Botanica

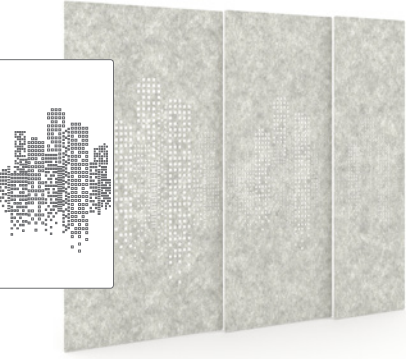


Skyline

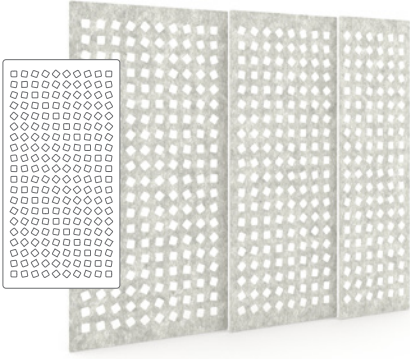


Cubes




Array

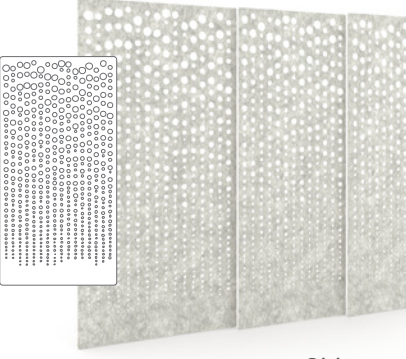

Shimmer

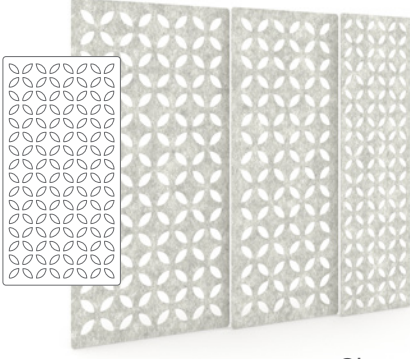

Clover

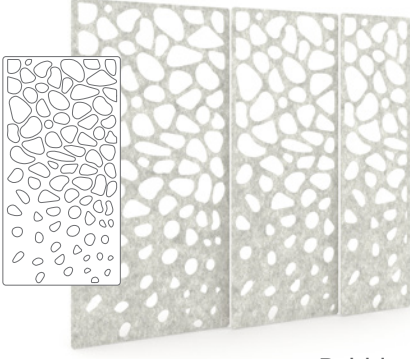

Pebbles

Specifications

Standard Widths	28", 38", 48"
Standard Heights	94"
Thickness	9mm / .35"
Density	1.9kg/m2
Composition	100% Polyester (min. 50% recycled PET fiber)
Sound Absorption	NRC Value .60
Mounting Options	Ceiling Suspension, Rail Suspension, Sliding Track
Environmental	Oeko-Tex Standard 100 certified, VOC free Made from 50% recycled water bottle content
Recyclability	100% Recyclable

Installation Time
15 minutes per panel.

Care & Maintenance Instructions
Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Warranty
10 years

Certifications
Oeko-Tex Standard 100
ATSM E-84 Class A
Indoor Advantage Gold™

Wall Tiles



Drop tiles in Tuscan, Ash and Pearl

3F Wall Tiles allow for unlimited creativity and inspiration, with an array of shapes that work in both subtle and bold ways. Lightweight and easy to install,

Wall Tiles in 9mm felt are offered in 12 shapes and 10 Verve colorways, bringing vibrancy and visual interest while improving acoustical quality in open plans.




Hexagon tiles in Shadow, Ash, Sand and Seafoam




Rhombus tiles in Saffron, Ash and Pearl

Wall Tiles Shapes


See page 26 for color options.




Balloon




Circle




Hexagon



Belt



Dome



Rhombus



Chevron



Drop



Square



Stripe




Trapezoid



Triangle

Wall Tiles Pattern Ideas

Wall Tiles are sold individually and can be mixed and matched for infinite design options.

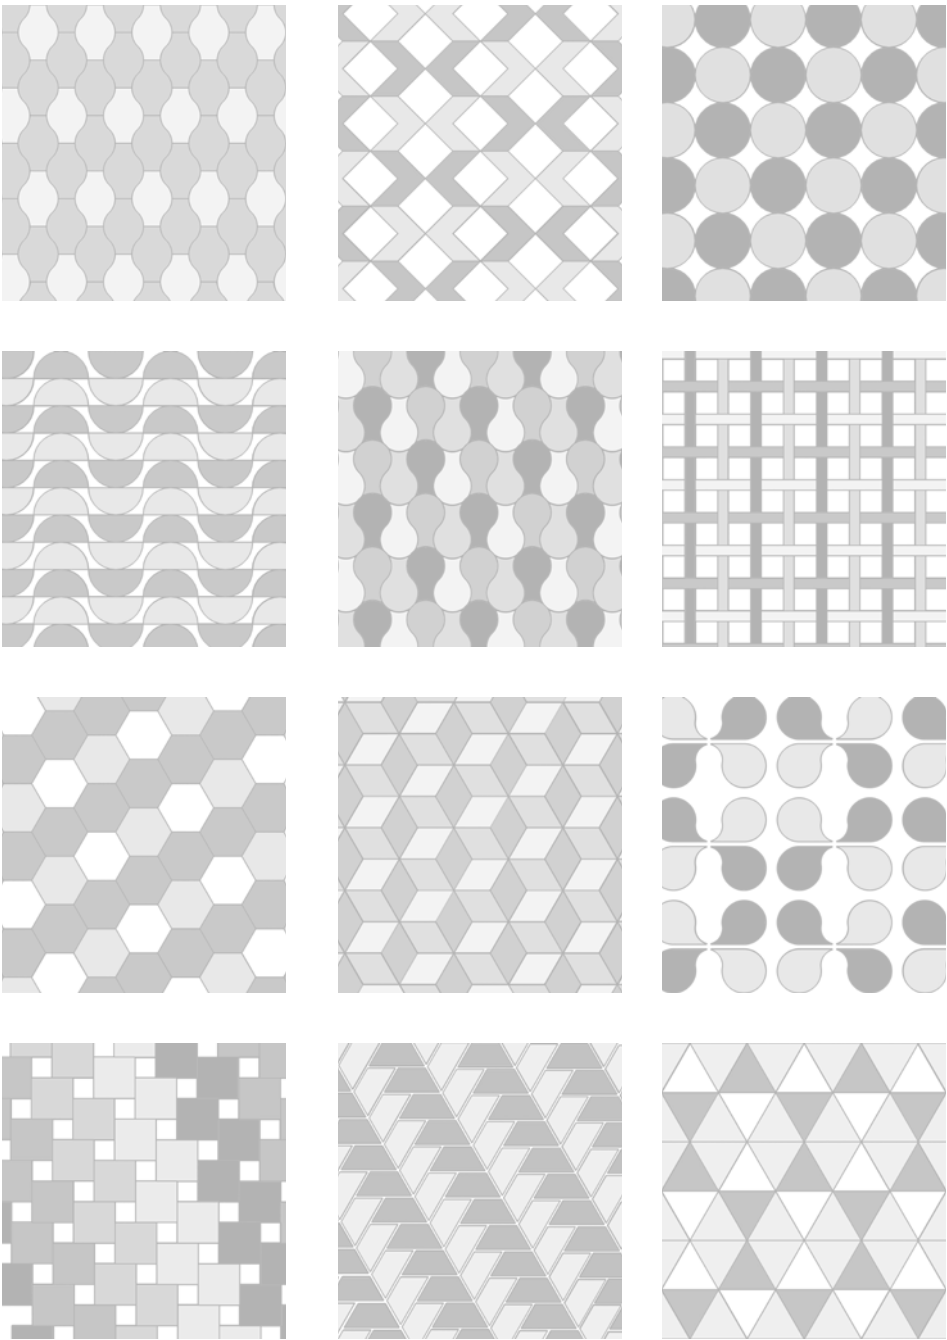



Circle and Balloon tiles in Saffron, Verde, Celestial, Pearl, Seafoam and Sand

Specifications

Standard Widths	12"
Thickness	9mm / .35"
Density	1.9kg/m2
Composition	100% Polyester (min. 50% recycled PET fiber)
Sound Absorption	NRC Rating: 0.3
Mounting Options	Industrial Tape (approx. 1 roll per 60 tiles)
Environmental	Oeko-Tex Standard 100 certified, VOC free
Recyclability	100% Recyclable

Installation Time
5 minutes.

Care & Maintenance Instructions
Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Warranty
10 years

Certifications
Oeko-Tex Standard 100
ATSM E-84 Class A
Indoor Advantage Gold™

Finishes

Verve Collection




All three 3F products are available in our 10-color felt Verve collection.


Content	100% Polyester (50% recycled water bottle content)
Weight	3.0Kg/m2 ±0.1
Thickness	18mm ±0.1
Environmental	Oeko-Tex Standard 100

Care & Maintenance
Wipe lightly with a damp soapy cloth.
Rinse with cold water and wipe dry with a clean cloth.


Privacy Screens

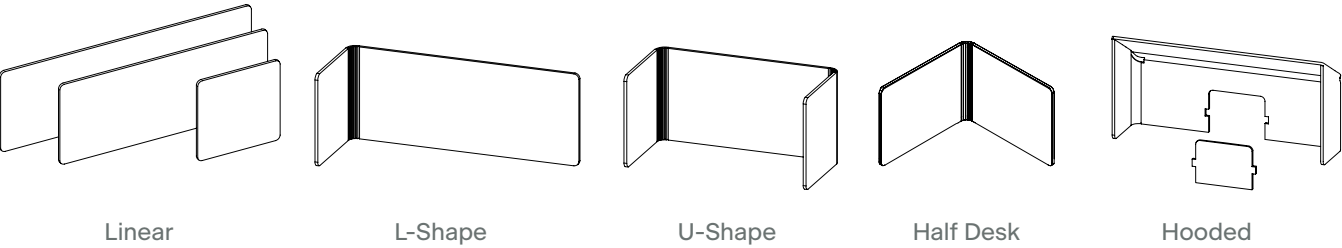

Hanging Panels

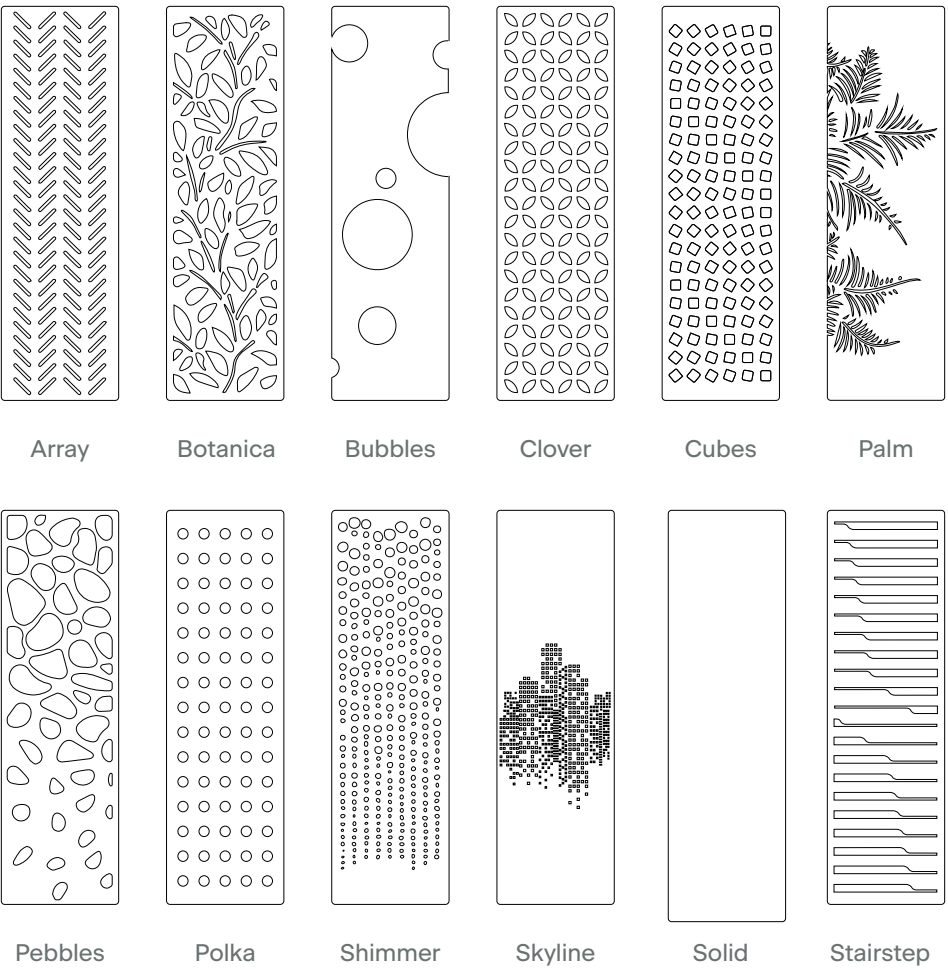


Wall Tiles

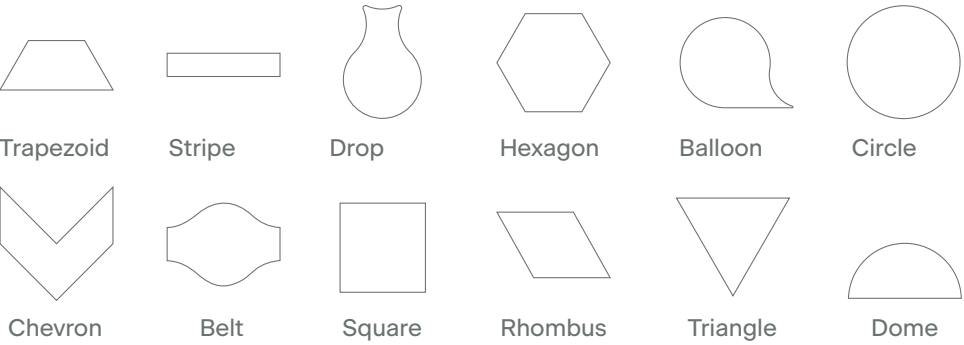

Installation + Attachments


Hanging Panels

Four attachment styles to choose from.

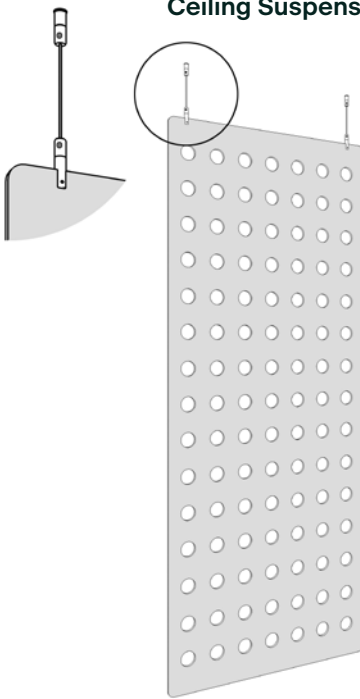


Ceiling Suspension

Suspension kit mounts directly onto the ceiling. Suspension cable is 5' long, giving the customer choice over the suspended height of the panel.

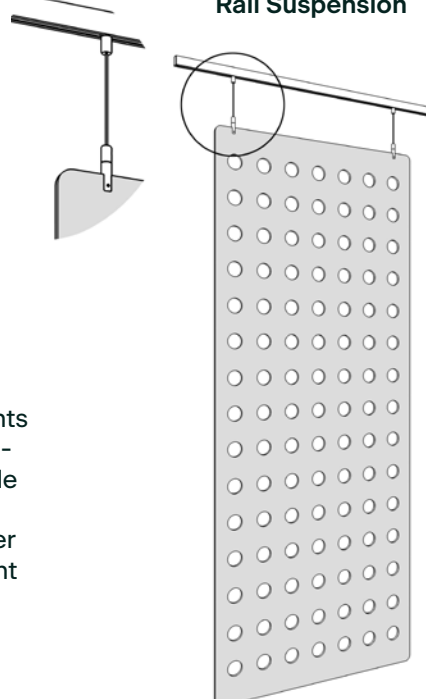


Rail Suspension

Rail mounts onto the ceiling and panels are suspended from the rail (fixed). Helps with the linear alignment of panels.

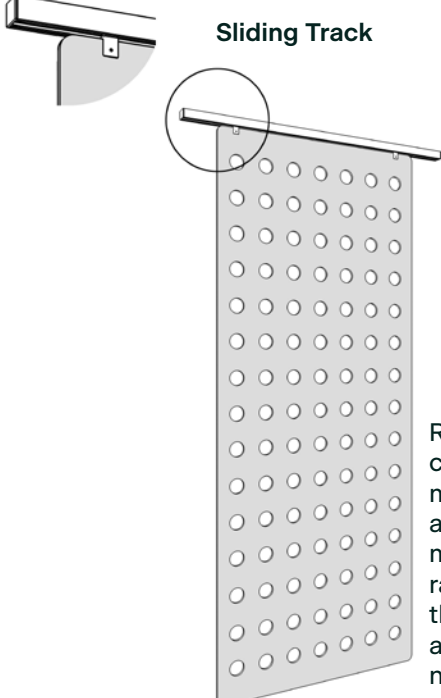

Sliding Track

Rail mounts to the ceiling and panels mount to the track, allowing for sliding movement along the rail. Creates spaces that easily transition according to privacy needs.

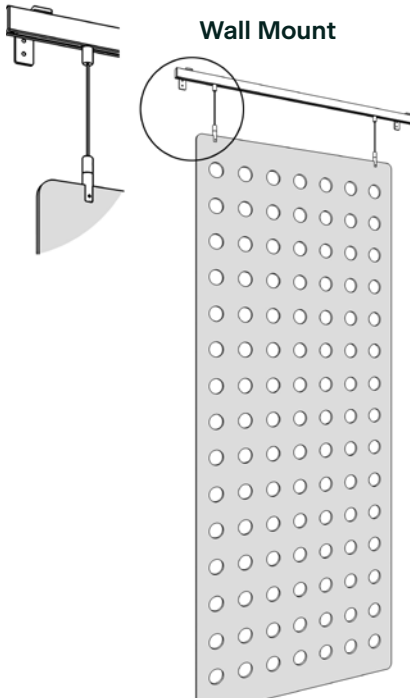

Wall Mount

Track mounts to wall rather than ceiling, with panel suspended from track. Can be installed with either rail or sliding track.

Wall Tiles


Simple adhesive application with supplied mounting tape, works on any surface.



Adhesive tape is supplied. Works on wood, stucco, brick, metal and any other surface.


Privacy Screens

Choose from 5 bracket styles to fully customize 3F screens for your needs.

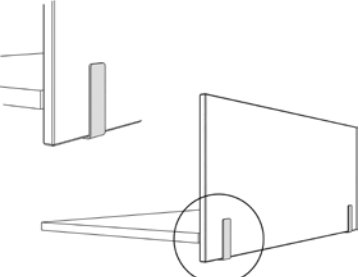


Sleeve

Easy to install solution offering visual uniformity, hiding loose cables under worksurface.

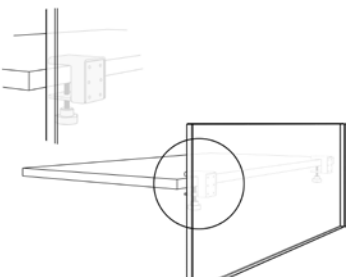


Fixed Privacy Modesty

Adjust for desired privacy above and below the worksurface at each individual workstation.

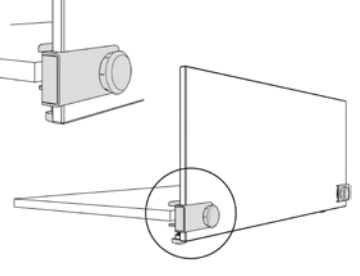

User Height Adjustable

For dynamic environments that require change and individual control over privacy.

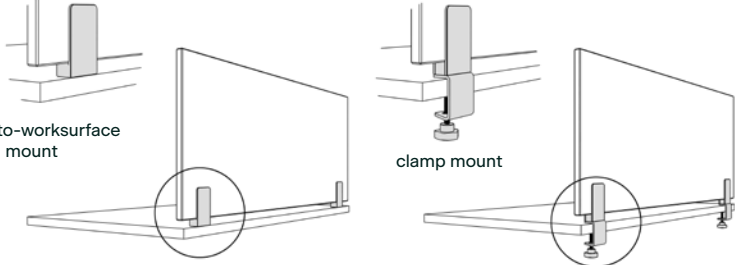

Top Mounted
With Optional Clamp

direct-to-worksurface mount clamp mount

Fix mount on top of worksurface for a uniform height across all workstations. Option to install with clamp to avoid drilling into worksurface.

For full functionality and instructions, refer to our online spec sheets and installation instructions.



Learn more at
amqsolutions.com/3F

