

Activ

Bases / Desks





Activ Height Adjustable Workstations

Activ Pro – 2 stage

Statement of Line..... 7

Specifications8

Finishes.....10

Activ Pro3

Statement of Line..... 12

Specifications 14

Finishes..... 15

Activ Pro 2.0

Statement of Line.....19

Specifications20

Finishes..... 22

Features23

Activ Desks




Activ 3 Stage desk with T-legs in White with Acacia worksurface


Activ Pro



Statement of Line

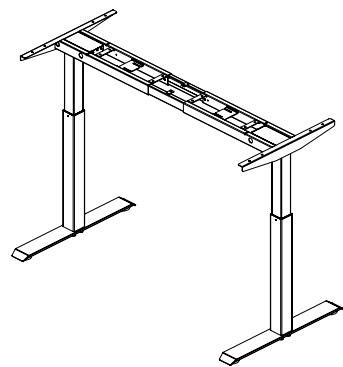


Activ-Pro 2 Stage
dual motor, legs in T or C foot style

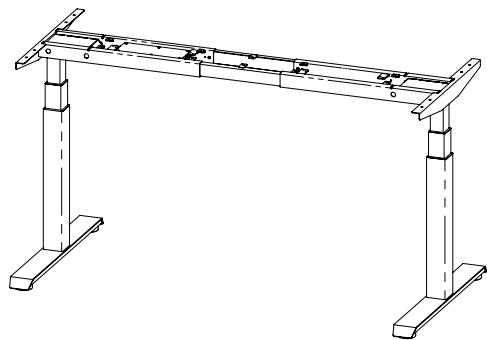


Activ-Pro 3 Stage
dual motor, legs in T or C foot style

Worksurfaces




Linear

Privacy Screens




3F Screens

Accessories



Wire Tray



Soft Cable Management

Specifications

Activ Pro/2-Stage Legs

Handset	Push button with 4 programmable settings
Safety	Anti-collision
Foot Length in Inches	22" and 28" for 24" and 30" deep worksurfaces
Legs	2 stage, available with T or C Leg
Leg Diameter	2.75" x 2.75"
Height Range (excluding top)	27" - 46.7"
Height Range (including top)	28" - 47.7"
Frame Width Expansion	width extendable 48"-72" in 1mm increments
Worksurface Widths	46", 48", 52", 54", 58", 60", 64", 66", 70" and 72"
Worksurface Depths	24" and 30"
Max Lifting Capacity	225 lbs
Base Weight Without Top	66 lbs
Gauge of Steel	2mm for inner tube and 1.5mm for outer tube
Speed	33mm/s
Standby Consumption	.2W
Active Consumption	Max 400W and Max 5A
Decibel Rating	50db≤
Total Stroke	500 mm
Power Cord	9’ cord length with standard NEMA 3 prong plug
Finishes	Platinum, White, Black and Merle
UL	UL962

Specifications

Activ Pro/3-Stage Legs

Handset	Push button with 4 programmable settings
Safety	Anti-collision
Foot Length in Inches	22" and 28" available for 24" and 30" deep worksurfaces
Legs	3 stage, available with T or C Leg
Leg Diameter	2.75" x 2.75"
Height Range (excluding top)	23.5" - 49"
Height Range (including top)	24.5" - 50"
Frame Width Expansion	width extendable 48"-72" in 1mm increments
Worksurface Widths	46", 48", 52", 54", 58", 60", 64", 66", 70" and 72"
Worksurface Depths	24" and 30"
Max Lifting Capacity	250 lbs
Base Weight Without Top	72 lbs
Gauge of Steel	2mm
Speed	38mm/s
Standby Consumption	.2W
Active Consumption	Max 400W and Max 5A
Decibel Rating	50db≤
Total Stroke	650 mm
Power Cord	9’ cord length with standard NEMA 3 prong plug
Finishes	Platinum, White, Black and Merle
UL	UL962

Finishes



Worksurfaces

2L84 Milk White	2L30 Arctic White	2L83 Seagull	2LAW Ash Wenge	2LCW Clay Wenge
2LCN Clay Noce	2LAT Acacia	2LAK Clear Oak	2L09 Clear Maple	26L1 Natural Cherry
24L0 Graphite Walnut	25L5 Virginia Walnut	25L8 Clear Walnut		

Frames

F1 Platinum	F2 White
F3 Black	F4 Merle

Installation Time

20 minutes per base, including worksurface

Care & Maintenance Instructions

Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Warranty

10 years, including parts and approved labor.


Certifications

ANSI/BIFMA X5.5-2014
Indoor Advantage Gold™

Activ Pro3




Statement of Line

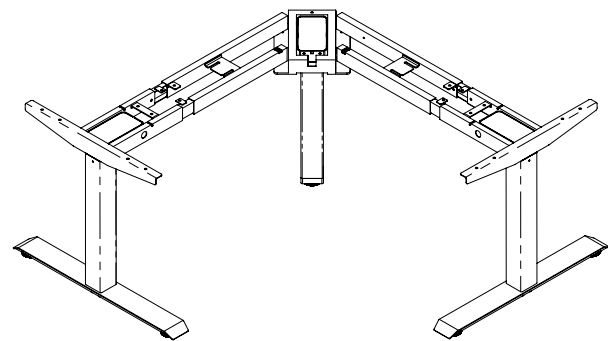


Activ-Pro3
3 legs/triple motor
90°/120° configurations

Worksurfaces




Linear




90°/120°

Privacy Screens




3F Screens

Accessories



Wire Tray



Soft Cable Management

Specifications

Activ Pro3/3-Stage Legs

Handset	Push button with 4 programmable settings
Safety	Anti-collision
Foot Length in Inches	22" and 28" available for 24" and 30" deep worksurfaces
Leg Stage	3 stage
Leg Diameter	2.75" x 2.75"
Height Range (excluding top)	23.5" - 49"
Frame Width Expansion	120°: 470mm / 90°: 500mm
Worksurface Widths	Linear: 48", 60", 72" (see pricebook for 90° and 120° sizes)
Worksurface Depths	24" and 30"
Max Lifting Capacity	300 lbs
Gauge of Steel	Inner/Middle tubes: 2mm / Outer tube 2mm
Base Weight Without Top	113 lbs
Speed	38mm/s
Standby Consumption	0.2W
Active Consumption	Max 500W and Max 13.5A
Decibel Rating	50db≤
Total Stroke	650 mm
Power Cord	9' cord length with standard NEMA 3 prong plug
Finishes	Platinum, White, Black and Merle
UL	UL962

Finishes



Worksurfaces

2L84 Milk White	2L30 Arctic White	2L83 Seagull	2LAW Ash Wenge	2LCW Clay Wenge
2LCN Clay Noce	2LAT Acacia	2LAK Clear Oak	2L09 Clear Maple	26L1 Natural Cherry
24L0 Graphite Walnut	25L5 Virginia Walnut	25L8 Clear Walnut		

Frames

F1 Platinum	F2 White
F3 Black	F4 Merle

Installation Time

30 minutes per base, including worksurface

Care & Maintenance Instructions

Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Warranty

10 years, including parts and approved labor.

Certifications

ANSI/BIFMA X5.5-2014
Indoor Advantage Gold™

Features – Activ Pro/Pro3



Choose 2 or 3 stage legs with T or C foot style



Seamless integration with Iline




Complete workstations: privacy screens, monitor arms, cable management, storage and seating



Linear, 90° and 120° Worksurfaces



Standard handsets with 4 memory presets


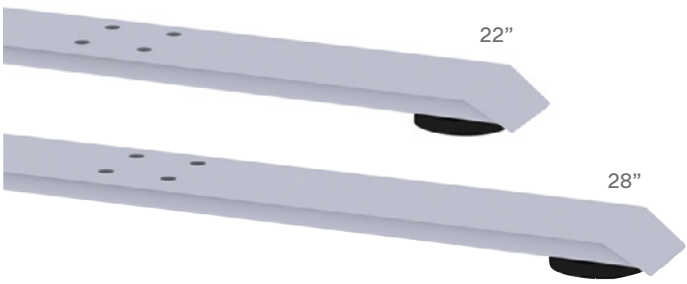


Two foot lengths support 24" and 30" deep work surfaces

Features – Activ Pro


Gyroscope / Anti-Collision Technology

Activ bases have built-in gyroscope sensors in their control boxes which can detect angle and speed changes on three axis, triggering the anti-collision safety feature. When activated, bases reverse direction for 2 seconds before stopping. Reaction Time: 50ms-600ms

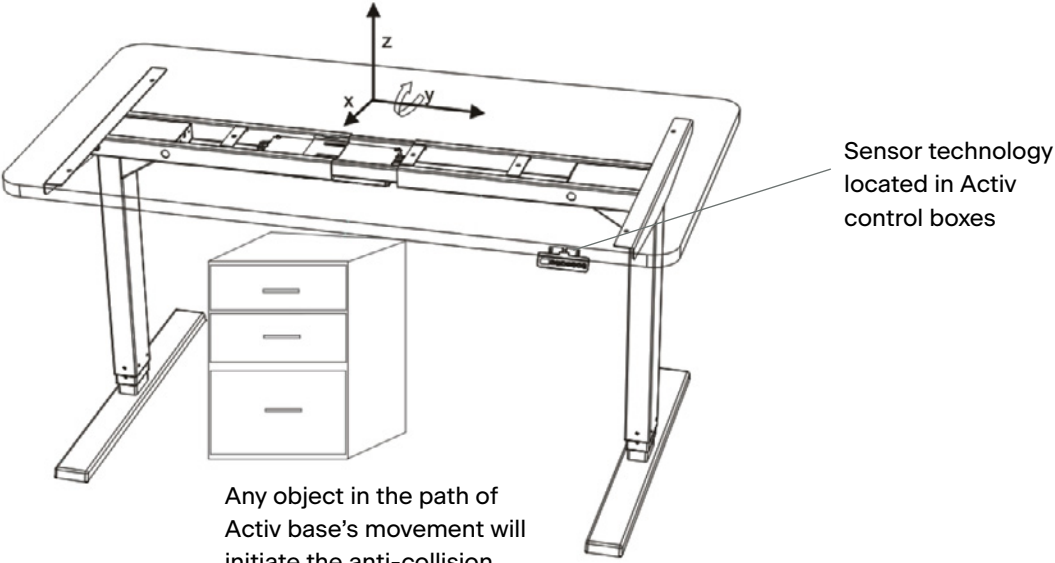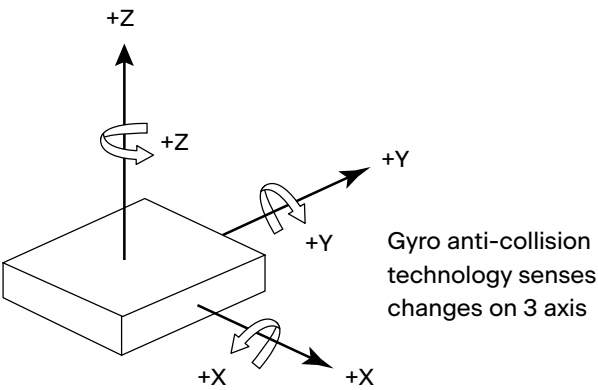


Any object in the path of Activ base's movement will initiate the anti-collision safety feature, reversing the direction of the base


Activ Pro 2.0

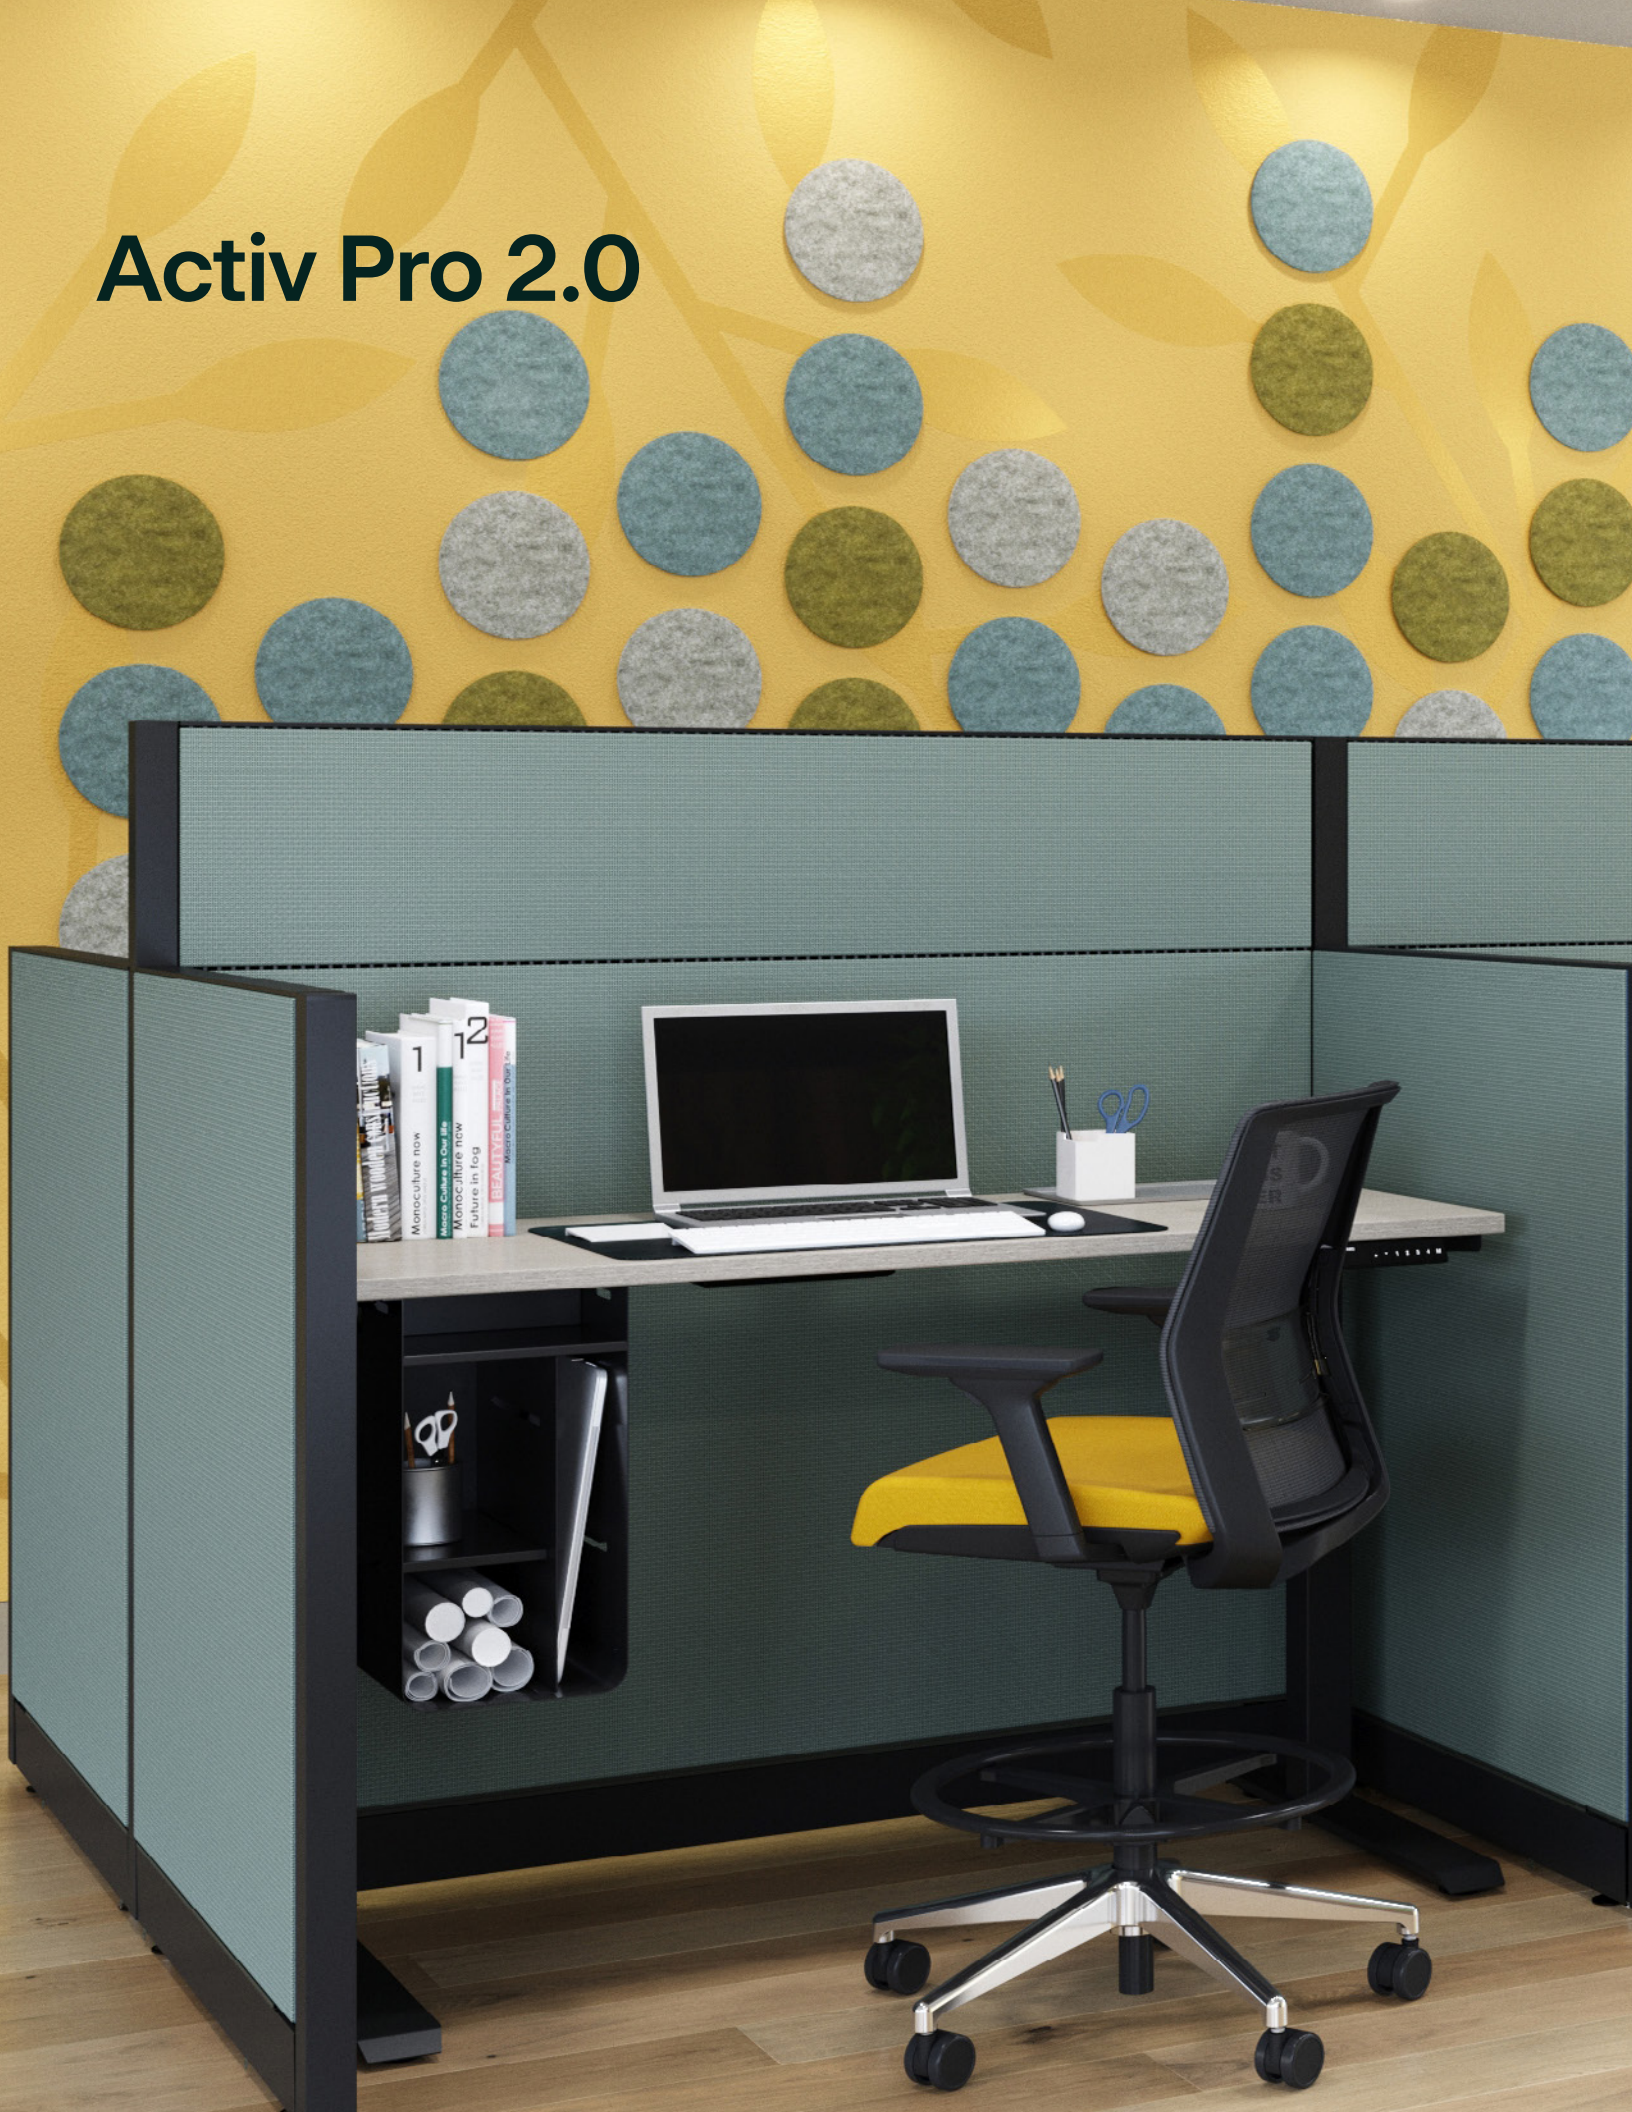

Statement of Line




Activ-Pro 2.0
dual motor, available with 2- or 3-stage
legs in T or C foot style

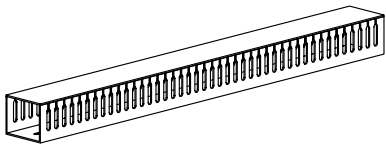


Integrated Wire Management

Worksurfaces




Linear

Accessories



Wire Tray



Soft Cable Management

Specifications

Activ Pro 2.0 /2-Stage

Active Consumption	Max 350W and Max 5A
ANSI BIFMA	X5.5
Base Weight Without Top	66 lbs
Decibel Rating	50db≤
Finishes	Platinum, White, Black and Merle
Foot Length in Inches	23.5” and 27.5” for 23/24” and 29/30” deep worksurfaces
Frame Width Expansion	width extendable 44”-72” in 1mm increments
Gauge of Steel	2mm for inner tube and 1.5mm for outer tube
Green Certification	SCS Gold
Handset	Push button with 4 programmable settings
Height Range (excluding top)	26.3” - 46”
Height Range (including top)	27.3” - 47”
Leg Diameter	2.75" x 2.75"
Legs	2 stage, available with T or C Leg
Max Lifting Capacity	225 lbs
Power Cord	9' cord length with standard NEMA 3 prong plug
Safety	Obstruction detection technology
Speed	33mm/s
Standby Consumption	.2W
Total Stroke	500 mm
UL	UL962
Worksurface Depths	23”, 24”, 29” and 30”
Worksurface Widths	46", 48", 52", 54", 58", 60", 64", 66", 70" and 72"

Specifications

Activ Pro 2.0 /3-Stage

Active Consumption	Max 350W and Max 5A
ANSI BIFMA	X5.5
Base Weight Without Top	72 lbs
Decibel Rating	50db≤
Finishes	Platinum, White, Black and Merle
Foot Length in Inches	23.5” and 27.5” for 23/24” and 29/30” deep worksurfaces
Frame Width Expansion	width extendable 44"-72" in 1mm increments
Gauge of Steel	2mm
Green Certification	SCS Gold
Handset	Push button with 4 programmable settings
Height Range (excluding top)	21.6” - 47.7”
Height Range (including top)	22.6” - 48.7”
Leg Diameter	2.75" x 2.75"
Legs	3 stage, available with T or C Leg
Max Lifting Capacity	250 lbs
Power Cord	9' cord length with standard NEMA 3 prong plug
Safety	Obstruction detection technology
Speed	38mm/s
Standby Consumption	.2W
Total Stroke	650 mm
UL	UL962
Worksurface Depths	23”, 24”, 29”, and 30”
Worksurface Widths	46", 48", 52", 54", 58", 60", 64", 66", 70" and 72"

Finishes

Base

F1 Platinum	F2 White	F3 Black	F4 Merle
----------------	-------------	-------------	-------------

Worksurface

2L84 Milk White	2L30 Arctic White	2L83 Seagull	2LAW Ash Wenge	2LCW Clay Wenge
2LCN Clay Noce	2LAT Acacia	2LAK Clear Oak	2L09 Clear Maple	26L1 Natural Cherry
24LO Graphite Walnut	25L5 Virginia Walnut	25L8 Clear Walnut		



Installation Time
< 20 minutes per base, including worksurface

Care & Maintenance Instructions
Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Warranty
10 years, including parts and approved labor.

Certifications
ANSI/BIFMA X5.5-2014
Indoor Advantage Gold™



Features



Choose 2 or 3 stage legs with T or C foot style



Integrated Wire Management



Seamless integration with Iline



Standard handsets with 4 memory presets



Complete workstations: privacy screens, monitor arms, cable management, storage and seating



Two foot lengths support 23", 24", 29" and 30" deep worksurfaces





**Design and export a
customized cut sheet
for Activ in our online
3D Design Tool:
amqsolutions.com/activ**

