

3F

Wall Tiles




Statement of Line




Belt




Chevron




Circle



Hexagon



Rhombus



Balloon



Dome



Drop



Stripe



Square



Trapezoid




Triangle

Finishes

Screens (Verve Felt Collection)


FC1 Briquette	FC2 Shadow	FC3 Ash	FC4 Pearl	FC5* Celestial
FC6 Verde	FC7 Tuscan	FC8 Saffron	FC9 Sand	FC10 Seafoam

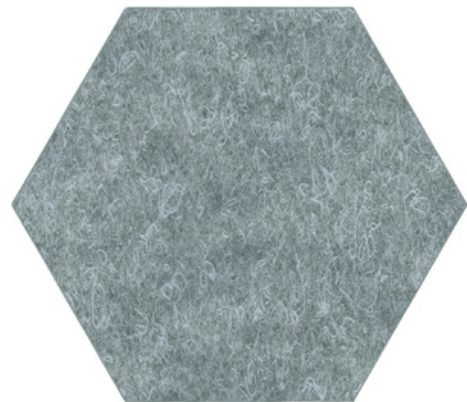

Specifications

Composition	100% Polyester (min. 50% recycled PET fiber)
Density	1.9kg/m2
Environmental	Oeko-Tex Standard 100 certified, VOC free
Flammability	ATSM E-84 Class A
Mounting Options	Industrial Tape (approx. 1 roll per 60 tiles)
Recyclability	100% Recyclable
Sound Absorption	NRC Rating: 0.3
Standard Widths	11.5"
Thickness	9mm / .35"


Shape Line View

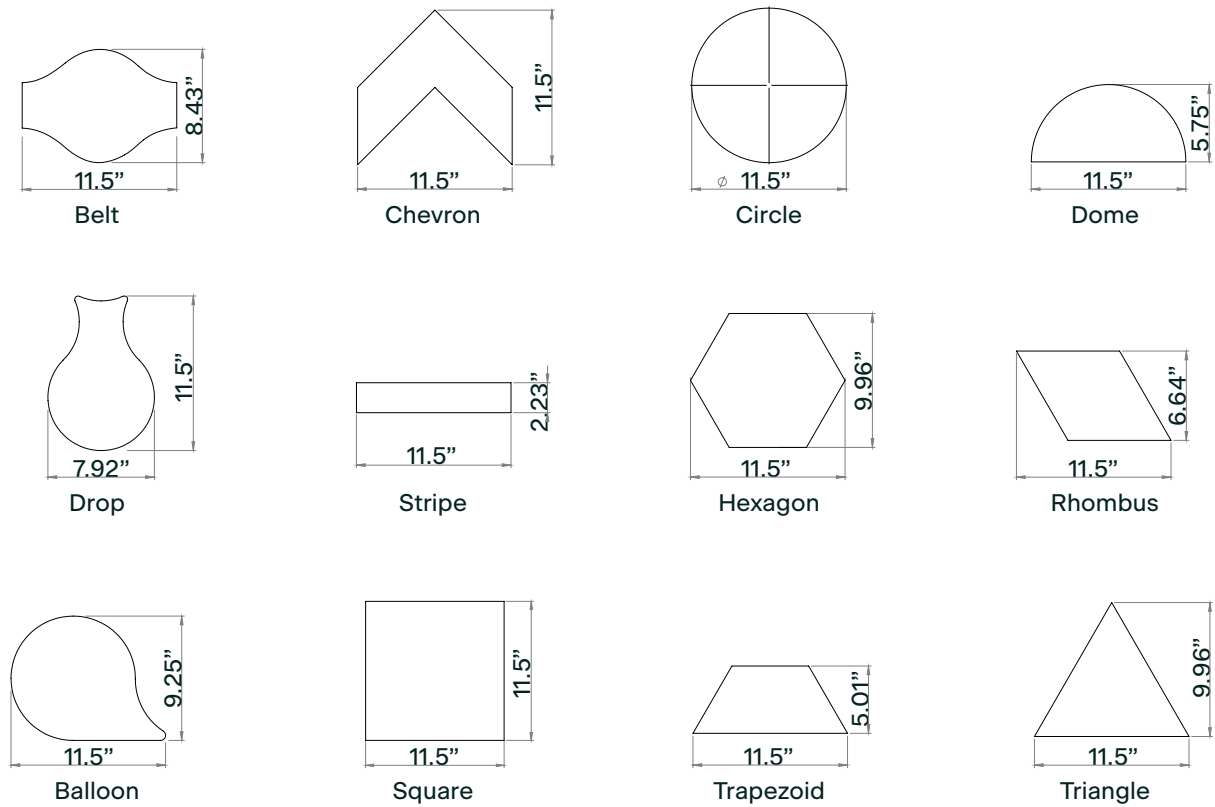


Features



Create inspiring spaces with improved acoustical quality

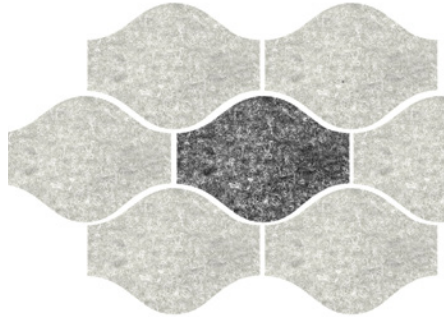

12 different tile shapes

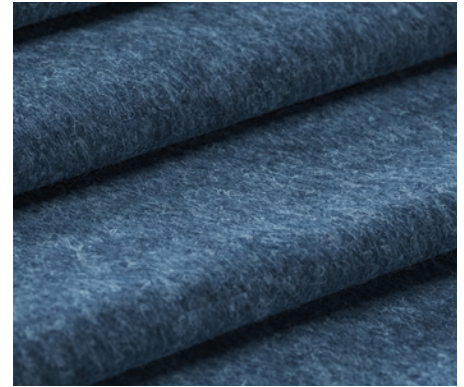


10 Verve color options



Easy, durable and unobtrusive mounting



Infinite color/pattern combinations



Sold per tile for unlimited customization

Installation Time

2 minutes per tile.

Warranty

10 years

Care & Maintenance Instructions

Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Certifications

Oeko-Tex Standard 100
ATSM E-84 Class A
Indoor Advantage Gold™