

Concur


Training Tables



Statement of Line

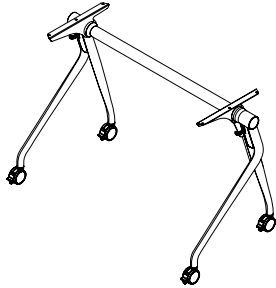


Frame Assembly

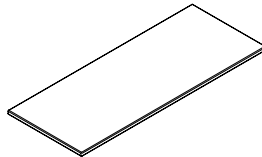


Worksurface


Optional

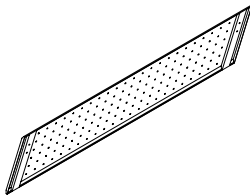

Modesty Panel



Ganging Kit



Power

Installation Time

10 minutes per base, including worksurface

Warranty

10 years, including parts.

Care & Maintenance Instructions

Wipe with a damp cloth using water or gentle, nonabrasive cleaner. For guaranteed safety, patch test with diluted cleaner before wiping entire surface. Wipe dry with a clean cloth.

Certifications

ANSI/BIFMA X5.5-2014
ETL Listed, UL Recognized
Indoor Advantage Gold™

Finishes

Frames

F1 Platinum	F2 White
----------------	-------------

Modesty Panel

Graphite

Worksurfaces


2L84 Milk White	2L30 Arctic White	2L83 Seagull	2LAW Ash Wenge	2LCW Clay Wenge
2LCN Clay Noce	2LAT Acacia	2LAK Clear Oak	2L09 Clear Maple	26L1 Natural Cherry
24L0 Graphite Walnut	25L5 Virginia Walnut	25L8 Clear Walnut		



Specifications

Cantilever Depth	13.75"
Castors	Soft, Height Adjustable, Locking
Certifications	BIFMAX5.5-2014
Clearance between Modesty Panel and Floor	12"
Electrical Compliance	ETL Listed, UL Recognized
Frame Color	Platinum and White
Frame weight without top	27 lbs
Frame width	47.25", 59.05" and 70.85"
Height (excluding top)	28.5"
Leg Depth	21"
Modesty Panel	Steel
Modesty Panel Height	14"
Modesty Panel Width	39.5", 51.25" and 63.1"
Power Box	2 electrical outlets with worksurface clamp
Power in-feed length	72"
Weight Capacity	200 lbs
Width between front legs	44.5", 56.25" and 68.1"
Width between rear legs	40.75", 52.5" and 64.35"
Worksurface depths	24" and 30"
Worksurface thickness	1"
Worksurface widths	48", 60" and 72"

Features

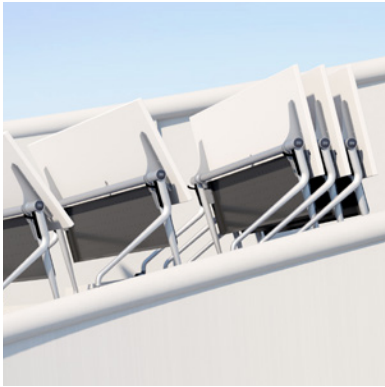


Push button flip/lock/nest functionality



48", 60" and 72" wide / 24" and 30" deep




Optional modesty panel

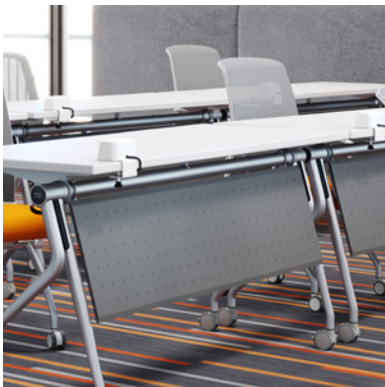

Optional ganging kit for consistent clean rows and layouts



Locking castors with height adjustability

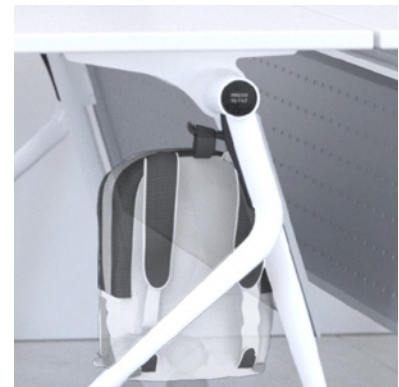


Two bag drop hooks per table



Optional power distribution system connects up to eight tables

Power

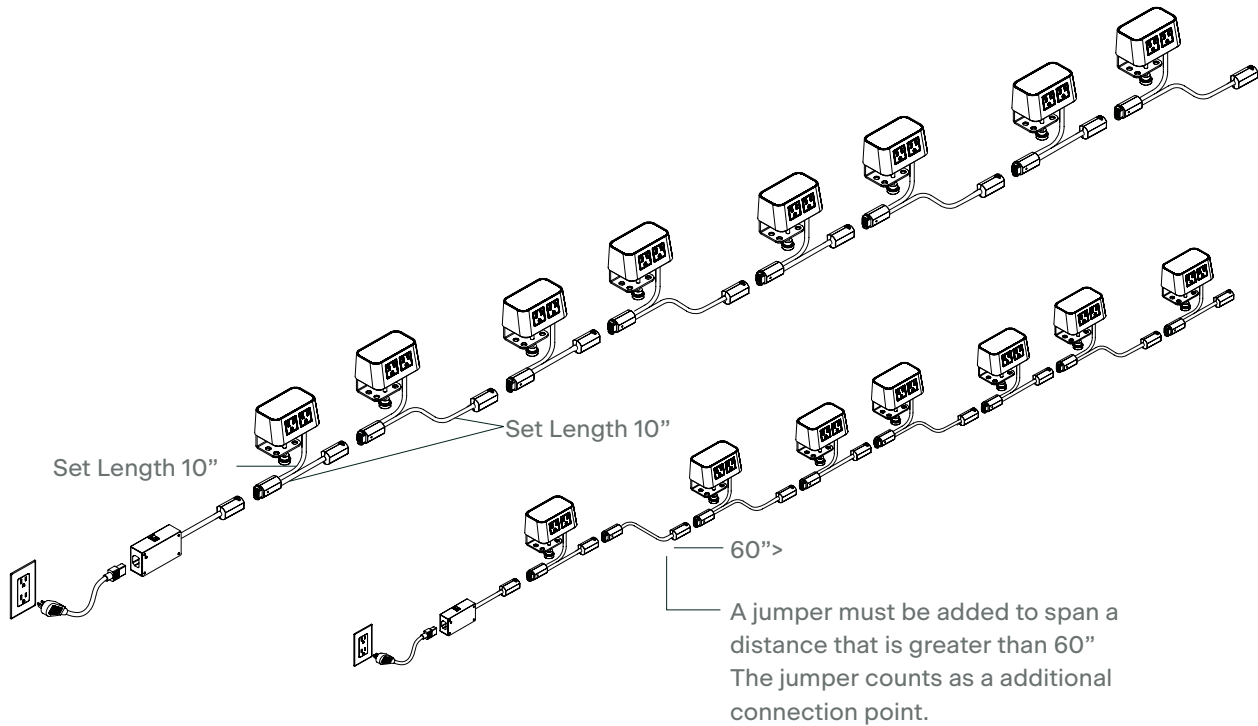

- Power infeed with control box and 6' cord.
- Directional, cannot be back fed
- Connections are non-sequential
- Visual indicator of system status
- Connect up to 8 Concur Tables from a single 15 amp corded infeed.
- ETL Listed
- UL Recognized